

QUICK SET-UP GUIDE

HORSE FLOAT and CARAVAN ANNEXES



INITIAL SET-UP. Track section not included.

Many caravans and Horse Floats already have a length of channel fixed to the side of the vehicle. If yours does not, you'll need to purchase 4 metres from your local hardware store. It is a standard item and is fixed to your vehicle with self-tapping screws or pop rivets.

Fix the track at a height between 2.1m and 2.4m above ground. Allow clearance for door.

1



1. Fit Holder Bag to track section.

Slide the holder bag into the track section. To make the annexe a permanent fixture, slip a "bung and grub screw" into each end of the track. Tighten with the Allen Key (supplied) to prevent the bag sliding out when travelling.


2



2. Unzip holder bag and unroll annexe.

Pull the annexe out of its holder bag and allow it to drape beside the vehicle.

3

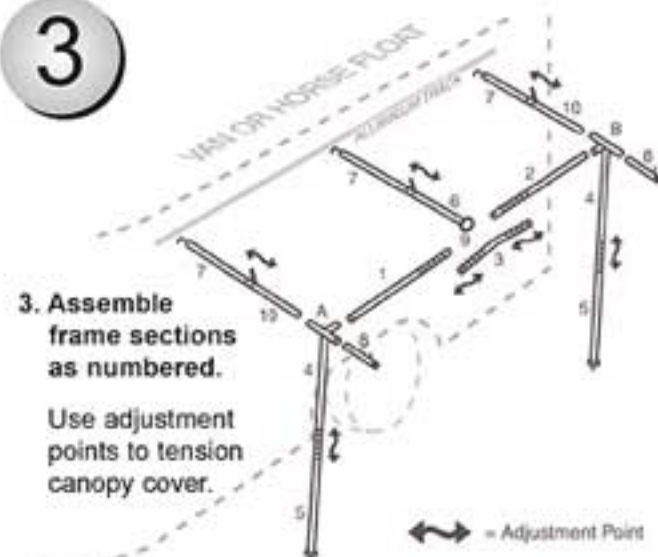

3. Assemble frame sections as numbered.

Use adjustment points to tension canopy cover.

↔ = Adjustment Point

4



Hook pole ends through rubber pads and insert ring clips to secure.

IMPORTANT

4. Secure roof poles to eyelets and re-fit rings. Rubber pads are fixed to inside of holder bag.

5



5. Peg and tension annexe with guy ropes. **HAPPY CAMPING!**

QUICK SET-UP GUIDE

HORSE FLOAT and CARAVAN ANNEXES

PACKING AWAY




1. Disconnect roof poles.

Release the friction levers and disconnect the roof poles from the legs.



2. Stow roof poles.

Swivel the roof poles back to holder bag and secure with restraints provided.

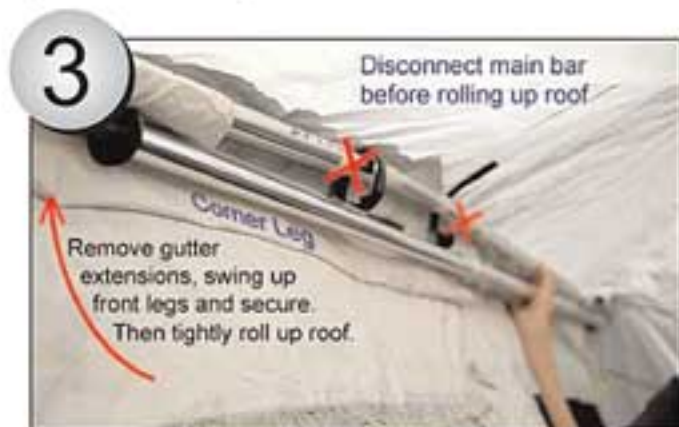

3. Swing up front legs.

Once you have disconnected the roof poles you can swing up the corner legs. To enable easy roll up, disconnect the curved joiner at the main bar.



4. Roll up your annexe

With front frame secured, fold the side walls in towards the middle and begin to tightly roll up the annexe, then secure it in the holder bag.



5. Close the holder bag.

With the annexe stowed in the holder bag, you are ready to safely travel to your next destination.

REMEMBER

If you intend to leave the annexe and holder bag fitted as a permanent fixture, you'll need to insert the bungs and grub screws into the track at each end of the holder bag.

BETTA
MARQUEE

Visit our website for more information and updates:
www.bettamarquee.com.au